


IDEAS GENERATED DRAWING. DON'T CHANGE BY HAND.

REV. ECN NO. APPD.

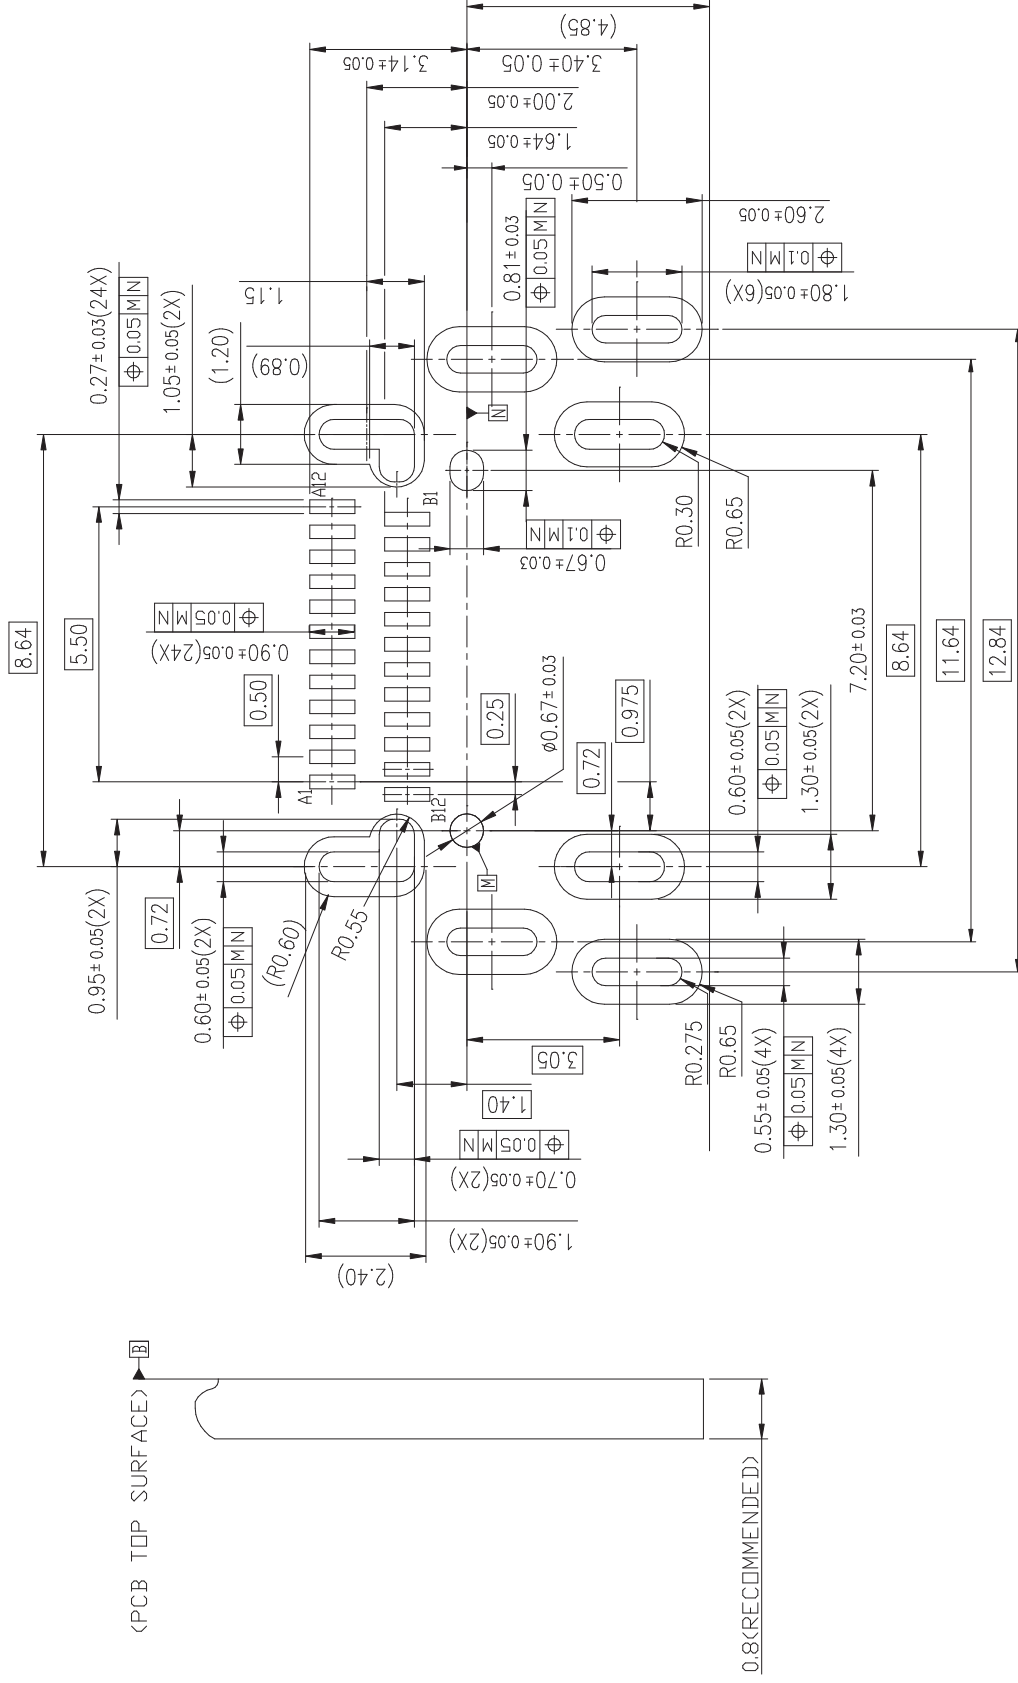

RECOMMENDED PCB LAYOUT(TOP VIEW)

TOLERANCE:±0.05




X.± 0.30	X'± 5'	UNITS mm	NAME(INTENDED USE) USB REC. ASSEMBLY DRAWING	 FOXCONN INTERCONNECT TECHNOLOGY LIMITED. CLASS: <input type="checkbox"/> CONFIDENTIAL <input type="checkbox"/> GENERAL <input checked="" type="checkbox"/> SECRET
.X± 0.25	.X'± 2'	MAT'L	PART NO.(INTENDED USE) UT12113-1160H-7H	
.XX± 0.15	.XX'± 1'	FINISH	APPD: Nick Lin	TITLE: CUSTOMER DRAWING(TYPE-C CH1.60)
.XXX± 0.10	.XXX±	QTY	CHKD: Bill He	DWG NO.: 327-0000-3794
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF FOXCONN INTERCONNECT TECHNOLOGY LIMITED AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF FOXCONN INTERCONNECT TECHNOLOGY LIMITED.			DRAW: Hunk Liu 5/02'19	SCALE SHEET REV. 1:1 2/3 C

8 FK2B00065D

IDEAS GENERATED DRAWING. DON'T CHANGE BY HAND.

REV.	ECN NO.	APPD.

PULL OUT DIRECTION →

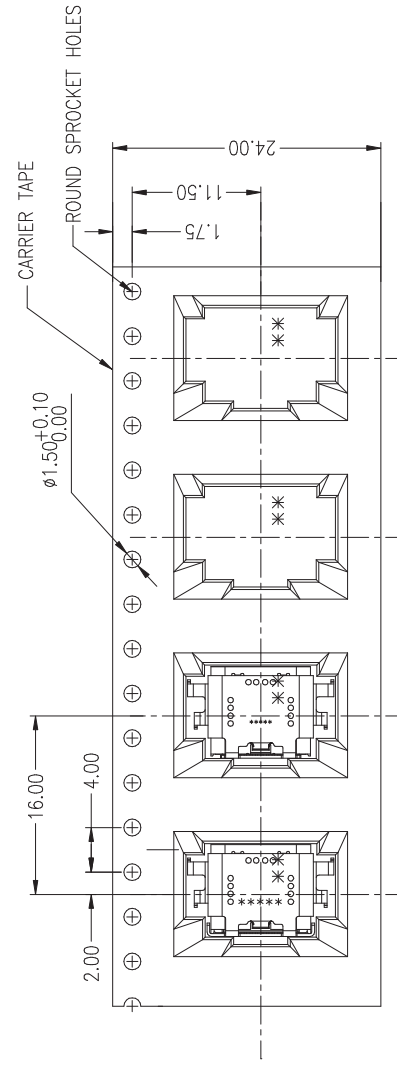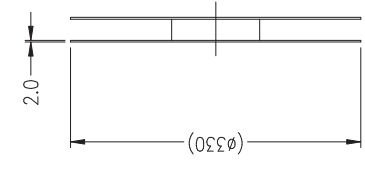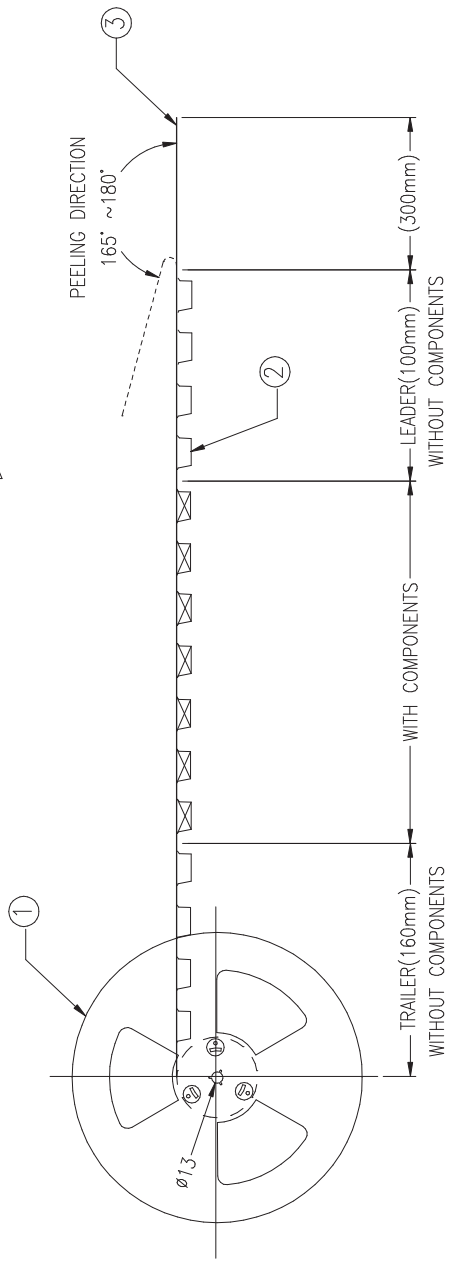

NOTES:

1. 10 POCKETS HOLE PITCH CUMULATIVE TOLERANCE: ±0.20mm.
2. NUMBER OF CONNECTORS: 800 PCS/REEL, 4000PCS/CARTON.
3. COVER TAPE PEELING STRENGTH: 0.1kgf MAX. AT 300mm/min.

③	COVER TAPE	POLYSTYRENE
②	COVER TAPE	POLYESTER
①	REEL	POLYSTYRENE
ITEM	DESCRIPTION	MATERIAL

 FOXCONN INTERCONNECT TECHNOLOGY LIMITED.	NAME (INTENDED USE)	PACKAGE DRAWING	
	PART NO. (INTENDED USE)	UT12113-1160H-7H	
CLASS:	<input type="checkbox"/> CONFIDENTIAL	<input type="checkbox"/> SECRET	<input checked="" type="checkbox"/> GENERAL
TITLE:	CUSTOMER DRAWING (TYPE-C CH1.60)		
DWG NO.:	327-0000-3794		
SCALE	1:1	SHEET 3/3	
REV.	C	C	